


# e.bloxx D1

Multi-Channel Analog Output Module



e.bloxx D1-1

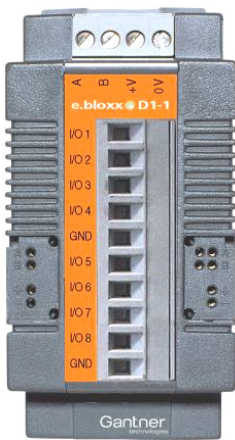

e.bloxx D1-4


## Most important features:

- **8 or 32 configurable digital inputs / outputs**
- **Status in/outputs**  
Process or host controlled  
(each I/O can be configured as IN or OUT)
- **Frequency in/outputs**  
Frequency measurement up to 2 MHz,  
frequency output up to 10 kHz
- **Counter inputs**  
Quadrature counter, up/down counter, up to 400 kHz
- **PWM in/outputs, time measurement**  
Measurement of duty cycle and frequency
- **Signal conditioning**  
Additional scaling, minimum/maximum, arithmetic, alarm
- **RS 485 fieldbus interface**  
Profibus-DP, Modbus-RTU, ASCII  
as well as connectable to any e.series Test Controller
- **Galvanic isolation**  
of I/O-signals, power supply and interface  
Isolation voltage 500 VDC
- **Electromagnetic Compatibility**  
according EN 61000-4 and EN 55011
- **Power supply 10...30 VDC**
- **DIN rail mounting (EN500022)**

The e.bloxx series is designed for industrial and experimental test systems requiring precise high speed measurement of electrical, thermal, and mechanical quantities in engine and component test beds.

All units are based on a clean modular design, and easily connect to the wide variety of field devices used in today's test beds. Sample rates up to 1000 Hz and resolutions up to 19 bit are possible depending on the module and signal type used. Standardized communication protocols (Profibus-DP and Modbus-RTU) allow the e.bloxx family to work with a wide variety of application hardware and software.

Adding an e.series Test Controller dramatically increases the system's throughput and connectivity options. An e.series Test Controller is a data concentrator, communication gateway, and optionally a Programmable Automation Controller (PAC) with 100Mbps Ethernet, Profibus-DP, EtherCAT, or CANopen.

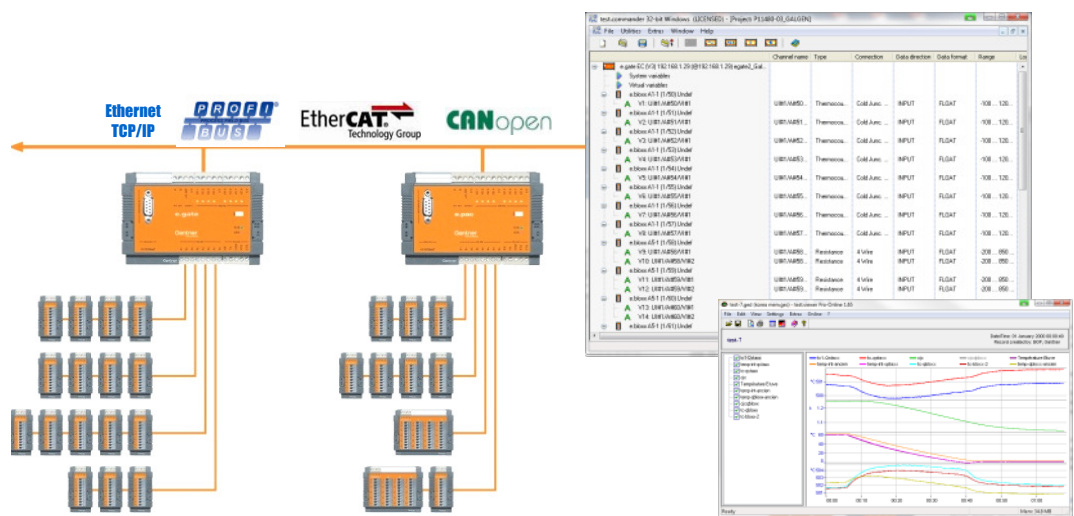

## Digital Inputs

|                             |                           |
|-----------------------------|---------------------------|
| Function per terminal strip | 8 x status inputs/outputs |
| or                          | 4 x frequency             |
| or                          | 4 x quadrature counter    |
| or                          | 4 x up/down counter       |

|                       |              |
|-----------------------|--------------|
| Status                |              |
| Response time         | 1 ms         |
| Frequency measurement |              |
| Time base             | 0.01 to 10 s |
| Max. frequency        | 400 kHz      |
| Counter               |              |
| Counter depth         | 32 bit       |
| Counter frequency     | 400 kHz      |

|                           |                         |
|---------------------------|-------------------------|
| Input voltage             | max. 30 VDC             |
| Input current             | max. 1.5 mA             |
| Upper switching threshold | >3.5 V (logical "Low")  |
| Lower switching threshold | <1.0 V (logical "High") |

|                     |             |
|---------------------|-------------|
| Reference frequency | 6 MHz       |
| Accuracy            | 0.01 %      |
| Temperature drift   | 0.01 %/10 K |

## Digital Outputs

|                |                            |
|----------------|----------------------------|
| Function       | Process or host controlled |
| Type of output | Open-Collector             |
| Output Voltage | max. 30 VDC                |
| Output Current | max. 100 mA                |

## Communication Interface

|                      |   |
|----------------------|---|
| Standard             | RS 485, 2-wire  |
| Data format          | 8E1   |
| Protocols            | ASCII, Modbus-RTU, Profibus-DP<br>Local-Bus               |
| Baud rate            |   |
| ASCII and ModBus-RTU | 19.2; 38.4; 57.6; 93.75; 115.2 kBaud                      |
| Profibus-DP          | 19.2; 93.75; 187.5; 500; 1500 kBaud                       |
| Local-Bus            | 19.2; 38.4; 57.6; 93.75; 115.2;<br>187.5; 500; 1500 kBaud |
| Connectable devices  | up to 32  |
| Galvanic isolation   | 500 V   |

## Power Supply

|                          |   |
|--------------------------|---|
| Power supply             | 10 to 30 VDC<br>overvoltage and overload protection |
| Power consumption        |   |
| e.bloxx D1-1             | approx. 1.5 W                                       |
| e.bloxx D1-4             | approx. 6 W   |
| Influence of the voltage | 0.001 %/V   |

## Mechanical

|                                      |                         |
|--------------------------------------|-------------------------|
| Case                                 | Aluminium and ABS       |
| Dimensions (W x H x D)<br>and weight |                         |
| e.bloxx D1-1                         | 45 x 90 x 83 mm ,160 g  |
| e.bloxx D1-4                         | 104 x 90 x 83 mm, 500 g |
| Protective system                    | IP20                    |
| Mounting                             | DIN EN-Rail             |

## Environmental

|                       |                                      |
|-----------------------|--------------------------------------|
| Operating temperature | -20 °C to +60 °C                     |
| Storage temperature   | -40 °C to +85 °C                     |
| Relative humidity     | 5% to 95% at 50 °C<br>non condensing |

## Firmware-Variant (included)

|                          |   |
|--------------------------|---|
| <u>Chronos</u>           |   |
| Function                 | frequency measurement   |
| Method                   | Chronos,<br>optimization by the combination of time measurement and edge counting direction detection (0°, 90°) |
| Number of input channels | 4   |
| Max. frequency           | 400 kHz   |
| Time base                | 0.01 to 1 s   |
| Reference frequency      | 6 MHz   |
| Accuracy                 | 0.01 %  |
| Temperature drift        | 0.01 %/10 K   |

|                          |   |
|--------------------------|---|
| <u>Chronos Fast</u>      |   |
| Function                 | frequency measurement (s. above)        |
| Number of input channels | 2                                       |
| Frequency range          | 1 Hz to 2 MHz                           |
| Time base                | 0.001 to 1 s                            |
| Reference frequency      | 48 MHz                                  |
| Resolution               | 0,002 %                                 |
| Accuracy                 | 0.01 %                                  |
| Temperature drift        | 0.01 %/10K                              |
| Refresh rate             | 1 ms at 1 channel<br>2 ms at 2 channels |

|                           |  |
|---------------------------|--|
| <u>Chronos PWM</u>        |  |
| Function                  | frequency measurement (s. above)           |
| Number of input channels  | 2  |
| Function                  | frequency output<br>pulse width modulation |
| Frequency range           | 0.1 Hz to 10 kHz (Accuracy 0.15 %)         |
| Number of output channels | 2 x frequencies or 2 x PWM                 |

|                          |  |
|--------------------------|--|
| <u>PWM Measure</u>       |  |
| Function                 | measurement of a pulse width modulated signal            |
| Number of PWM channels   | 2 x PWM signal 0 to 1<br>2 x frequency of the PWM signal |
| Signal frequency         | 1 Hz to 60 kHz   |
| Resolution               | 83.3 ns  |
| Configuration Meas. type | Duty cycle: Counter, frequency measurement               |

|                          |   |
|--------------------------|---|
| <u>Time Measure</u>      |   |
| Function                 | measurement of time between<br>Start and stop signal (each one I/O) |
| Number of time channels  | 2   |
| Time range               | 1 µs to 16 s  |
| Time resolution          | 1 µs  |
| Configuration Meas. type | frequency measurement   |

## Warm Up Time

All declarations are valid after a warm up time of 45 minutes.

Valid from Nov. 2010. Specification subject to change without notice.  
DB\_EBLOXX\_D1\_E\_20.docx